

ECOSTAR II

LOW GLARE COB TILTABLE RECESSED LED DOWNLIGHT

GDL806




FEATURES

- Die-cast aluminium body
- Powder coated finish
- PC optical lens and reflector
- Trailing edge dimmable driver included, pre-wired
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C



SQUARE FRONT COVER

DIMENSION

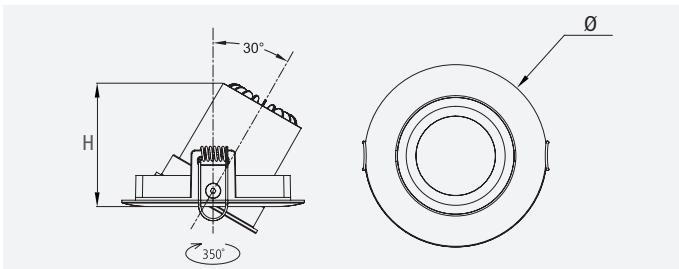

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL806 WW WH	230	9	700	3000	60	100×65	90	White	20
GDL806 WW BK	230	9	700	3000	60	100×65	90	Black	20

ECOSTAR II


LOW GLARE COB FIXED RECESSED LED DOWNLIGHT

GDL815


FEATURES

- Die-cast aluminium body
- Powder coated finish
- PC optical lens and reflector
- Trailing edge dimmable driver included, pre-wired
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

DIMENSION

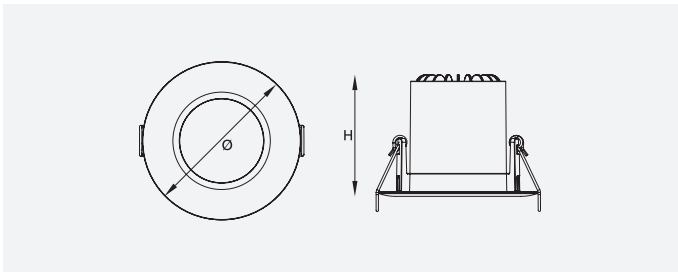

OPTIONS

- DIMMING:
 - Analogue dimming (1~10V)
 - Digital dimming (DSI, DALI)
- SQUARE FRONT COVER:
 - GDL806 SQ WH FRAME



CUT OUT SIZE: 80x80mm

- LOW-GLARE RING:
 - GDL806/LGR BK



TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL815 WW WH	230	9	700	3000	60	82×63	72	White	20
GDL815 WW BK	230	9	700	3000	60	82×63	72	Black	20

Specifications above are for reference only and may vary without prior notice