



ultra-high airflow

without all the noise

150mm Bathroom & Kitchen Fan

For best results, Simx recommend this product for bathrooms and kitchens.

In kitchen installations, do not install the fan, laterally, any closer than 2m from the cooktop. Visit our website for information on kitchen fans with a washable metal grease filter.

Once installed, following the instructions supplied, this product complies with the G4 Building Code for bathrooms and kitchens.

The Healthy Homes Standard requirement for bathroom or kitchen installation in a rental property is also met.

FAN7183 - standard switching

FAN7184 - timer switching



125mm Bathroom Fan

For best results, Simx recommend this product for bathrooms.

Once installed, following the instructions supplied, this product complies with the G4 Building Code for bathrooms.

The Healthy Homes Standard requirement for bathroom installation in a rental property is also met.

FAN7180 - standard switching


FAN7181 - timer switching





WIRING DIAGRAM

220-240V AC 50 Hz

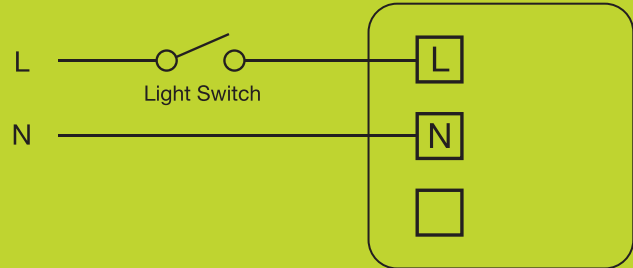


The single speed fan is switched via an existing or a new light switch, or auto sensor, (switch and sensor not supplied)

TECHNICAL SPECIFICATIONS

Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	IP Rating	Switching	Order Code
				(l/s)	(m ³ /hr)					
150	Axial	22	138	114	410	0.19	41	IPX4	Standard	FAN7183
									Timer	FAN7184
125	Axial	15	68	54	194	0.28	38	IPX4	Standard	FAN7180
									Timer	FAN7181

DIMENSIONS (mm)

Model	A	B	C	ØD
FAN7183 FAN7184	227	30.5	111	146
FAN7180 FAN7181	185	29	100	120

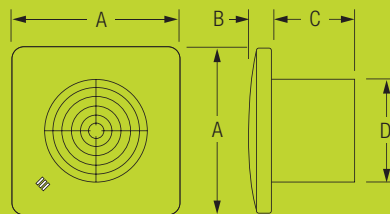

E6337

Complies with AS/NZS Standards
Specifications are subject to change without notice.

Distributed by Simx Limited

PO Box 14347, Panmure, Auckland 1741, New Zealand

p +9 259 1660 | e enquiry@manrose.co.nz | w www.manrose.co.nz

PUB1604 2008