

THROUGH WALL FAN KITS - Quiet

These efficient fan kits are easy to install and are designed to be ducted straight through an exterior wall. All kits include a weatherproof cowl. 5 year warranty.

Designer Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Switching	Order Code
					(l/s)	(m ³ /hr)				
	150	Axial	22	138	114	410	0.19	41	Standard	FAN7190
									Timer	FAN7191
	125	Axial	15	68	54	194	0.28	38	Standard	FAN7187
									Timer	FAN7188

Note: Installed system performance is always influenced by duct length and layout


Switching Options

Standard Remote switch (not supplied).

Timer Remote switch (not supplied). Fan continues operating for preset time after switching off. Timers are 2-30 minute adjustable and require permanent and switched phase.

Dimensions (mm)

Model	Cut-Out Size	A	B	C	D	E	F	G	H
FAN7190 FAN7191	173	174	30	150	375	146	111	30.5	227
FAN7187 FAN7188	140	160	30	125	375	120	100	29	185

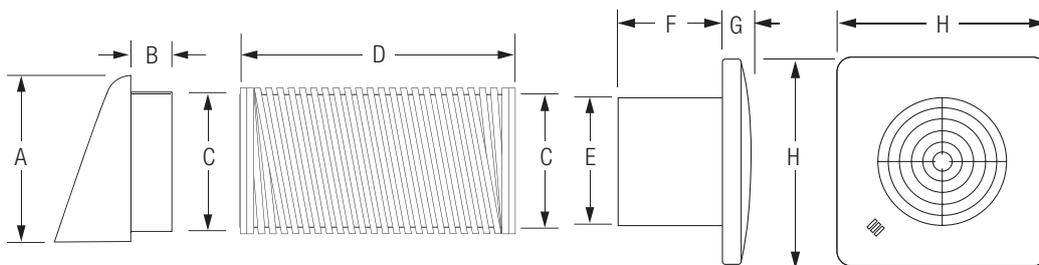

Technical

Supply	220-240V AC, 50Hz
Max. Operating Temp	40°C
IP Rating	IP54
Exterior Grille	Weatherproof Cowl
Duct	Aluminium Semi-Rigid
Duct Length	375mm