

ACCESSORIES CORRUGATED CONDUITS - GROUND BOXES SERIES GFLEX / TFLEX / POZ.

MAIN TECHNICAL FEATURES:

- Material: Transparent or grey self-extinguishing polyethylene.
- Self-extinguishing V0 degree according to UL94 standard.
- Smooth external surface.
- Conduit holding inner ribs
- Colour code GFLEX: G = Grey.

COLORLESS

IP40

GREY RAL 7035

Coupling for two pliable conduits with the same diameter

ITEM	CONDUIT DIAMETER mm	LENGTH mm	PACKAGING PIECES
ECGFLEX16	16	50	100/2000
ECGFLEX20	20	55	100/1200
ECGFLEX25	25	55	100/700
ECGFLEX32	32	60	50/400
ECGFLEX40	40	80	-/300
ECGFLEX50	50	90	-/150

Caps to avoid foreign bodies getting inside the corrugated conduits

ITEM	CONDUIT DIAMETER mm	PACKAGING PIECES
ECTFLEX16	16	100/2000
ECTFLEX20	20	100/2000
ECTFLEX25	25	100/1500
ECTFLEX32	32	50/800
ECTFLEX40	40	50/500
ECTFLEX50	50	50/300

Watertight PP ground box with carriageable cover.

ITEM	EXTERNAL DIMENSIONS mm	INTERNAL DIMENSIONS mm	LOAD CARRING CAPACITY kN	PACKAGING PIECES
ECPOZ.25	250x250	220x220	2,10	1

PP ground box with carriageable cover


ITEM	EXTERNAL DIMENSIONS mm	INTERNAL DIMENSIONS mm	LOAD CARRING CAPACITY kN	PACKAGING PIECES
ECPOZ.20	200x200	160x160	2,10	1
ECPOZ.30	300x300	250x250	7,39	1
ECPOZ.40	400x400	350x350	9,57	1



Series GFLEX



Series TFLEX

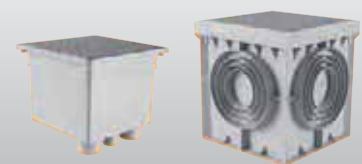

Series POZ.