


SPARE DOORS AND ACCESSORIES

MAIN TECHNICAL FEATURES:

- Polyester thermosetting boards, self-extinguishing HB according to UL94 standard, Halogen Free, UV-resistant, high resistance to corrosion, pollution, and chemical.
- Blank or with window door, opening angle greater than 180°, UV-resistant.
- Resistance to mechanical shocks IK 10 (shocks up to a 20 J).
- Back plates are made up to metal or insulating material, removable frames with DIN rails.
- Pole support kit in galvanized steel and adjustable stainless steel band (length 1 mt), max load 100 Kg.
- One-Screw-System: only one type of screws is used for the different accessories in order to permit a simple and easy assembly.



Dimensions mm WxHxD Modules Distance mm	Polyester board blank door	Polyester board transparent window	Blank spare door	Transparent spare door	Triangular spare key	Pole support (ø max 25 cm)	DIN rail adapter for 2 «MyLIFE» devices
PACKAGING	1 piece	1 piece	1 piece	1 piece	10 pieces	1 piece	40 pieces
I° 270x305x170	EC625001	EC625011	EC625001R	EC625011R	EC625ST	EC625SP1	---
II° 325x430x185 36M (3x12) 125 mm	EC625002	EC625012	EC625002R	EC625012R	EC6250ST	EC625SP1	ECL4608
III° 435x505x215 54M (3x18) 150 mm	EC625003	EC625013	EC625003R	EC625013R	EC6250ST	EC625SP3	ECL4608
IV° 435x655x215 72M (4x18) 150 mm	EC625004	EC625014	EC625004R	EC625014R	EC6250ST	EC625SP3	ECL4608
V° 545x655x265 96M (4x24) 150 mm	EC625005	EC625015	EC625005R	EC625015R	EC6250ST	EC625SP5	ECL4608
VI° 620x810x320 140M (5x28) 150 mm	EC625006	EC625016	EC625006R	EC625016R	EC6250ST	EC625SP5	ECL4608

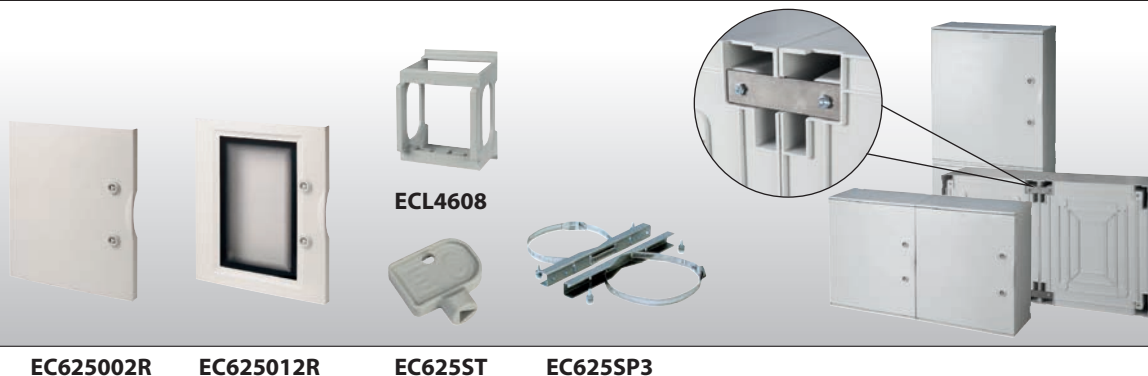

To get boards larger than 620x810 mm, you can put two or more boards with the same base or height together by using the joining kit EC625GI and the connecting devices series EC625XX.