



## Main

Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Separate

## Complementary

Product compatibility	Plug-in relay RXG with 2 C/O contact
[Ui] rated insulation voltage	250 V
[Uimp] rated impulse withstand voltage	6 kV
[In] rated current	5 A
[Ue] rated operational voltage	250 V conforming to IEC 300 V conforming to UL
Connections - terminals	Screw terminals, 1 x 0.25...1 x 2.5 mm <sup>2</sup> (AWG 22...AWG 14) flexible with cable end Screw terminals, 2 x 0.25...2 x 1 mm <sup>2</sup> (AWG 22...AWG 17) flexible with cable end Screw terminals, 2 x 0.5...2 x 1.5 mm <sup>2</sup> (AWG 20...AWG 16) solid without cable end Screw terminals, 1 x 0.5...1 x 2.5 mm <sup>2</sup> (AWG 20...AWG 14) solid without cable end
Screw type	M3

## Environment

Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...70 °C
Relative humidity	10...85 %
Standards	CSA C22.2 No 14 IEC 61984 UL 508
Product certifications	RoHS EAC CE CSA China RoHS

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.

	UL REACH
IP degree of protection	IP20
Overvoltage category	III
Pollution degree	3


### Packing Units

Package 1 Weight	42.000 g
------------------	----------

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions

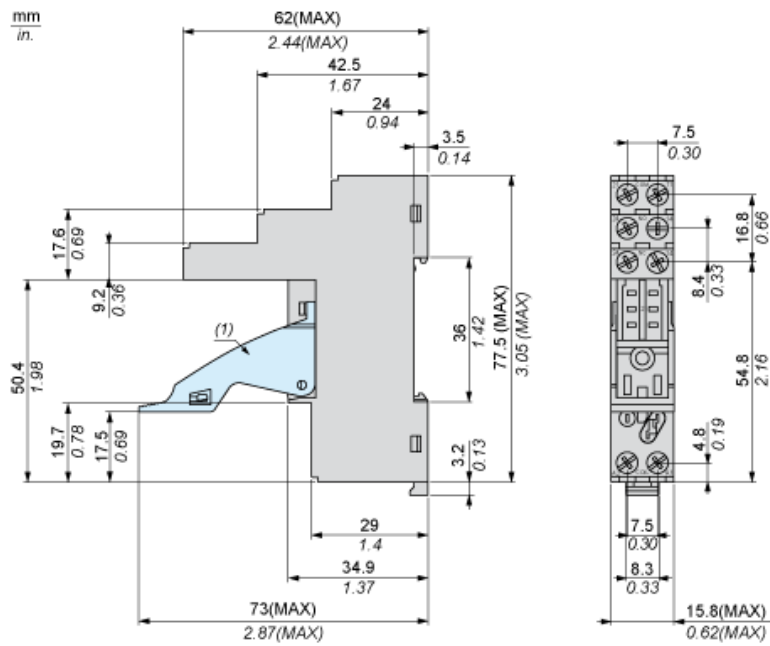

(1) Maintaining clamp

Wiring Diagram

