


LED DECK LIGHT 3WATT - 316/AU

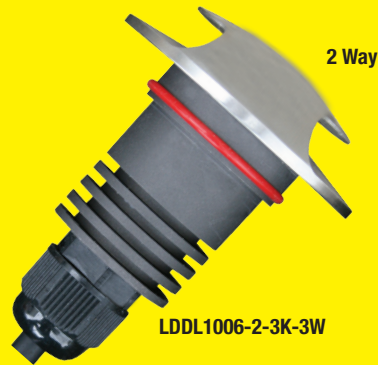

100deg

3W

95lm

CRI 83+

IP67

IK10


3000K

12-24VDC

CREE XP-G2 LEDs

| SPECIFICATION | | |
|---------------|-------------------------------------|------------------|
| CODE | LDDL1006-1-3K-3W | LDDL1006-2-3K-3W |
| INPUT | 12-24VDC | |
| POWER | 3Watt | |
| LUMENS | 95Lm | |
| CRI | 83+ | |
| COLOUR TEMP | 3000K | |
| DIMMABLE | No | |
| BEAM | 100deg | 2 x 100deg |
| IP RATING | IP67 | |
| IK RATING | IK10 | |
| DIMENSIONS | 60dia face x 75 deep x 34.5dia body | |
| CUTOUT | 40mm with former | |
| ENTRY CABLE | 1m of 2 core (0.75mm x 2) | |
| WARRANTY | 3 Years | |

DIMENSIONS

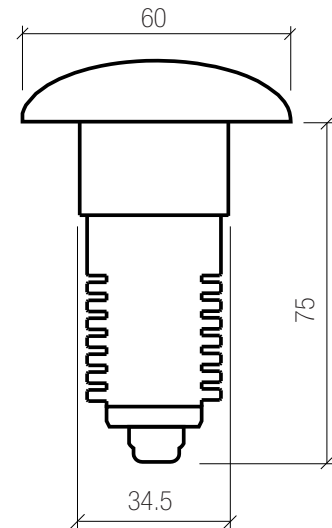

FEATURES:

- # Anti siphon cable.
- # CREE XP-G2 LEDs.
- # 316 stainless face.
- # 6063 structural grade aluminium body 25-30micron anodised.
- # Safe low voltage input.
- # High quality luminaire with 3 year warranty.

APPLICATIONS:

- # Exterior deck and wall lighting etc.
- # Marker lighting.

NOTE:

- # Comes complete with former tube for installation.
- # Constant voltage wired in parallel.
- # Voltage drop can be significant in long runs.
- # Plan cabling size accordingly.
- # IP67 is not recommended for in ground use.