


# WALL/CEILING FANS - Auto Shutter

These axial fans are designed for easy installation and efficient operation. Auto shutter models have automated backflow prevention vanes. 5 year warranty.

Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Model	Order Code
					(l/s)	(m <sup>3</sup> /hr)						
	300	Axial	82	60	306	1100	0.27	60	Square	Standard	XFS300A	FAN2041
	230	Axial	45	50	152	550	0.30	50	Square	Standard	XFS230A	FAN0346
	150	Axial	25	60	87	313	0.29	40	Square	Standard	XF150A	FAN0121
										Pull Cord	XF150AP	FAN0122
										Timer	XF150AT	FAN0123

**Note:** Installed system performance is always influenced by duct length and layout

## Switching Options

**Standard** Remote switch (not supplied).


**Timer** Remote switch (not supplied). Fan continues operating for preset time after switching off. 150mm models include fixed 7 minute timer. 125mm and 100mm model timers are 1-20 minute adjustable and require permanent and switched phase.

**Pull Cord** Integral part of fan.

## Dimensions (mm)

Model	Cut-Out Size	A	B	C	D	E
XFS300	310	362	156	81	75	300
XFS230	265	286	141	75	66	230
XF150	160	200	27	74	148	-
XF150A XF150AP	160	200	55	90	148	-

Please note: Fan cut out size is a nominal diameter.

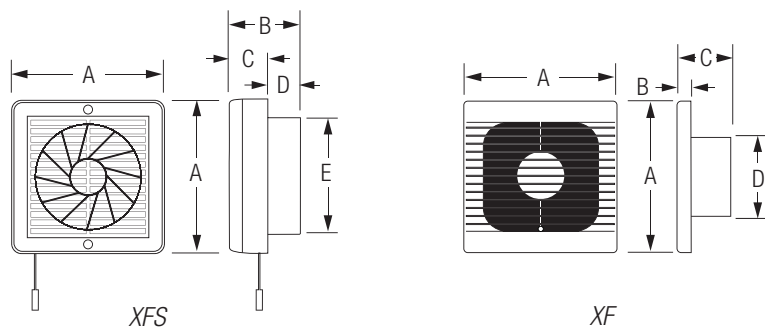

## Technical

Supply	220-240V AC, 50Hz
Max. Operating Temp	50°C
IP Rating	IPX4